



DIN RAIL / PANEL MOUNT, AVERAGE SENSING



Single Element
0 - 5 VDC, 0 - 10 VDC,
4 - 20 mADC Outputs

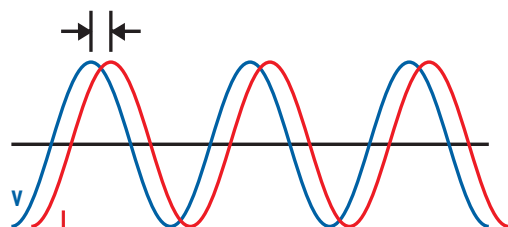

INDUCTIVE - CURRENT LAGGING VOLTAGE

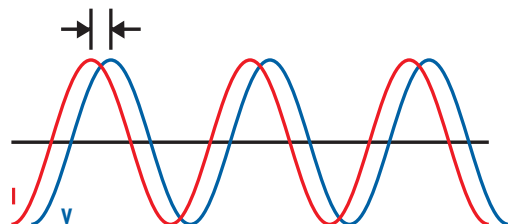

CAPACITIVE - CURRENT LEADING VOLTAGE

The **CR6300** Series, Power Factor Transducers, are designed to sense the Phase Angle difference between AC Current and Voltage signals.

Applications

- Motor Loading
- Correct Power Factor
- Measure Timing

Features

- Bandwidth is 5 KHz
- Up to 500V Input on Voltage
- Up to 25A Input on Current
- Extend Ranges with External CT's & PT's
- Measure -90 to +90 Phase Difference
- Available with 0-5 VDC, 0-10 VDC or 4-20 mADC Outputs
- 35mm DIN Rail or Panel Mount

Regulatory Agencies



Custom units can measure the phase angle difference between two AC Voltages or two AC currents are available. Contact factory for details.

* UL Recognition Pending

PART NUMBERS

CR6310	-		-		Single Element with 0 - 5 VDC Output
CR6311	-		-		Single Element with 0 - 10 VDC Output
CR6320	-		-		Single Element with 4 - 20 mADC Output

Add suffix for input range

- 110** - 0-110 VAC
 - 220** - 0-220 VAC
 - 500** - 0-500 VAC *
- Ranges available up to and including 600 VAC

- 25** - 0-25 AAC

Use a 5 amp CT to extend the range of this product line

* UL Recognition Pending



Another HUNTINGTON ELECTRIC Company

CR Magnetics, Inc. 3500 Scarlet Oak Blvd. St. Louis MO USA 63122 V: 636-343-8518 F: 636-343-5119

Web: <http://www.crmagnetics.com>



E-mail: sales@crmagnetics.com

Power Factor Transducer


DIN RAIL / PANEL MOUNT, AVERAGE SENSING

SPECIFICATIONS


Basic Accuracy:.....	0.5%	Insulation Voltage:.....	2500 VDC
Thermal Drift:.....	500 PPM/°C	Altitude:.....	2000 meter max.
Operating Temperature:.....	0°C to +60°C	Output Load:.....	4-20 mADC -0 to 300 Ω
Installation Category:.....	CAT II		0-5 VDC - 2K Ω or Greater
Pollution Degree:.....	2	Cleaning:.....	Water-dampened cloth
Response Time:	250 ms max. 0-90% FS	Relative Humidity:...	80% for temperatures up to 31°C and decreasing linearly to 50% at 40°C
Supply Voltage:.....	12 to 24 VDC	Torque Specs.:.....	3.0 inch lbs. (0.4Nm)
MTBF:.....	Greater than 100 K hours	Weight:.....	0.5 lbs.
Frequency Range:.....	20Hz - 5 KHz		



1 hole: 0.26(6.5) Dia. for CR6310, CR6311, CR6320 (shown)



OUTLINE DRAWING

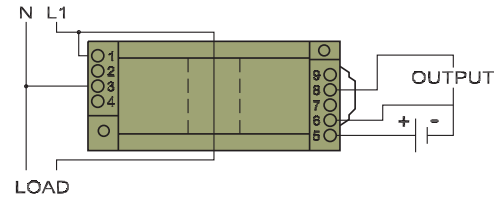


CR6310

0 - 5 VDC Output

CR6311

0 - 10 VDC Output

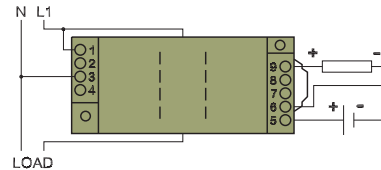

CR6320

4 - 20 mADC Output

CONNECTION DIAGRAM

NOTE: The building installation must have a switch or circuit-breaker that is in close proximity and within easy reach of the operator. The switch or circuit breaker shall be marked as the disconnecting device for the equipment.



Another HUNTINGTON ELECTRIC Company

CR Magnetics, Inc. 3500 Scarlet Oak Blvd. St. Louis MO USA 63122 V: 636-343-8518 F: 636-343-5119

Web: <http://www.crmagnetics.com>

E-mail: sales@crmagnetics.com

Transducers