

Average RMS AC Voltage Transducer

DIN RAIL / PANEL MOUNT, AVERAGE RMS

The **CR4800** Series, Average RMS Voltage Transducers and Transmitters are designed to provide a DC output proportional to the AC voltage input. These devices are best suited for general applications, such as fixed frequency voltage supplies.



CR4810 CR4811 CR4820
Single Element
0 to 5 VDC Output or 4 - 20 mADC outputs



CR4850 CR4860 CR4870 CR4880
Three Element
0 to 5 VDC or 4 - 20 mADC outputs

Applications

- Monitor Motor Faults
- Monitor Heating Elements
- Monitor Lighting Elements
- Remote Voltage Sensing

Features

- 35mm DIN Rail or Panel Mount
- Available with 0-5 Vdc, 0-10Vdc or 4-20 mADC outputs
- 24 Vdc powered
- Outputs isolated from inputs
- Connection diagram printed on case

Regulatory Agencies

- Approved to UL 61010B-1
- Approved to CAN/CSA-C22.2, No. 61010-1-2004
- Meets requirement of IEC 61010-1 and BS EN 61010-1



CR Magnetics has a wide selection of Potential Transformers to extend the range of any part. See Section H for details.

Add suffix for input range

PART NUMBERS			
CR4810	-		Single Element with 0 - 5 VDC output
CR4811	-		Single Element with 0 - 10 VDC output*
CR4820	-		Single Element with 4 - 20 mADC output
CR4850	-		3-Element 3-Wire with 0 to 5 VDC Output
CR4860	-		3-Element 3-Wire with 4 - 20 mADC Output
CR4870	-		3-Element 4-Wire with 0 to 5 VDC Output
CR4880	-		3-Element 4-Wire with 4 - 20 mADC Output
* CR4811 Series not UL approved			

- 50** - 0-50 VAC
 - 150** - 0-150 VAC
 - 250** - 0-250 VAC
 - 500** - 0-500 VAC
- Ranges available up to and including 600 VAC



Another HUNTINGTON ELECTRIC Company

CR Magnetics, Inc. 3500 Scarlet Oak Blvd. St. Louis MO USA 63122 V: 636-343-8518 F: 636-343-5119

Web: <http://www.crmagnetics.com>

E-mail: sales@crmagnetics.com

Transducers


Average RMS AC Voltage Transducer

DIN RAIL / PANEL MOUNT, AVERAGE RMS


SPECIFICATIONS

Basic Accuracy:.....	0.5%	Output Load:.....	0-5 VDC.....	2 K Ω or greater
Calibration:.....	Average Sensing, RMS Calibrated	4-20 mADC.....	0 - 300 Ω	
Thermal Drift:.....	500 PPM/ $^{\circ}$ C	Relative Humidity:.....	80% for temperatures up to	
Operating Temperature:.....	0 $^{\circ}$ C to +60 $^{\circ}$ C		31 $^{\circ}$ C and decreasing linearly to 50% at 40 $^{\circ}$ C	
Installation Category:.....	CAT II	Supply Current:		
Pollution Degree:.....	2	CR4810:.....	Typical 15mA	Max 30mA
Response Time:	250 ms	CR4820:.....	Typical 23mA	Max 45mA
Altitude:.....	2000 meter max.	CR4850:.....	Typical 25mA	Max 110mA
Insulation Voltage:.....	2500 Vdc	CR4860:.....	Typical 55mA	Max 110mA
Supply Voltage:.....	24 Vdc \pm 10%	CR4870:.....	Typical 25mA	Max 110mA
Frequency Range:.....	20 Hz - 5 KHz	CR4880:.....	Typical 55mA	Max 110mA
Cleaning:.....	Water-dampened cloth	Torque Specs:.....	3.0 inch lbs. (0.4Nm)	
MTBF:.....	Greater than 100 K hours	Weight:.....	0.5 lbs.	

C Transducers

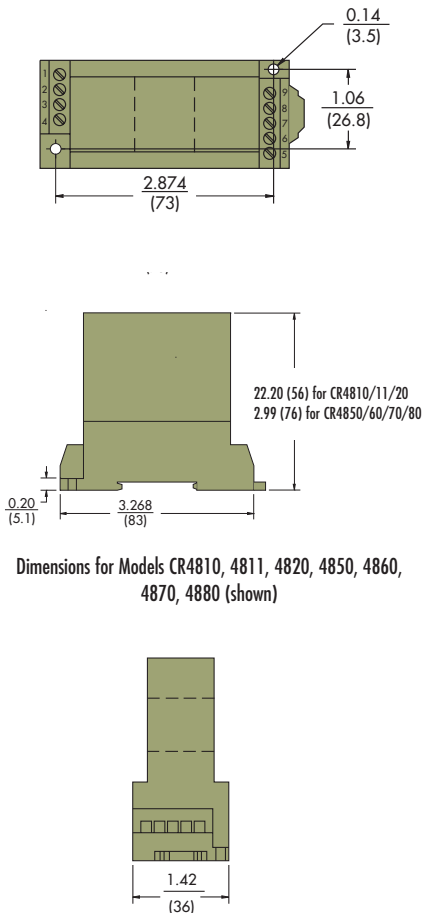

OUTLINE DRAWING




CR4810

Single Element - 0 - 5 VDC Output



CR4820

Single Element - 4 - 20 mA DC Output

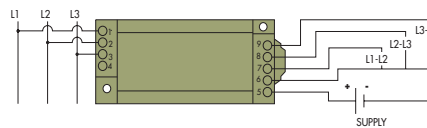


CR4850

3 Element, 3 Wire - 0 - 5 VDC Output




CR4860

3 Element, 3 Wire - 4-20 mA DC Output

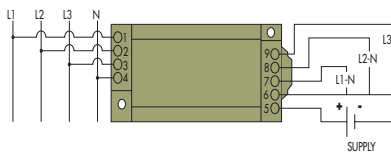

CR4870

3 Element, 4 Wire - 0 - 5 VDC Output

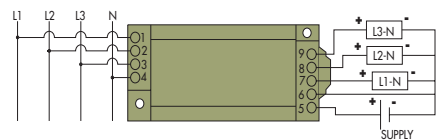

CR4880

3 Element, 4 Wire - 4 - 20 mA DC Output

CONNECTION DIAGRAM

NOTE: The building installation must have a switch or circuit-breaker that is in close proximity and within easy reach of the operator. The switch or circuit breaker shall be marked as the disconnecting device for the equipment.



Another HUNTINGTON ELECTRIC Company

CR Magnetics, Inc. 3500 Scarlet Oak Blvd. St. Louis MO USA 63122 V: 636-343-8518 F: 636-343-5119

Web: <http://www.crmagnetics.com>

E-mail: sales@crmagnetics.com